WXX460
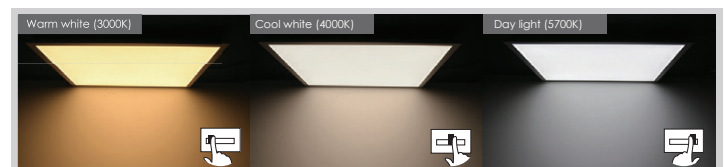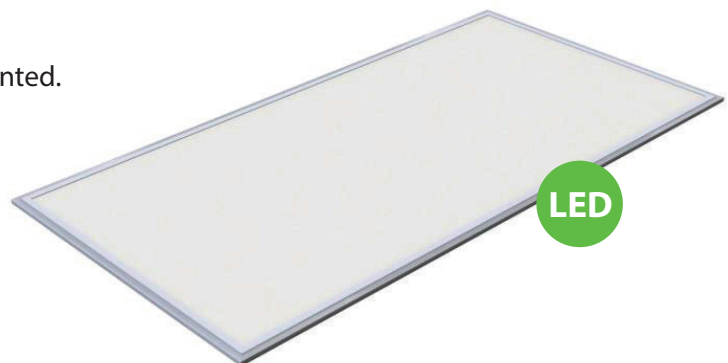## BACKLIT LED PANEL - CCT COLOUR CHANGEABLE - 60W
Non Dimmable

Length: 1195mm
Width: 595mm
Depth: 32mm

• Uniform light effect with optic lens.
• Integrated iron plate design provides excellent thermal management.
• Concise design offers high cost performance.
• Built-out driver.
• Installation: recessed, suspended and surface mounted.

Wattage: 60W
Voltage: 200-240V AC Flicker free driver
LED Module Input: 30-42V DC 1500mA CC
Light Source: SMD
CCT: 3-CCT - 3000K + 4000K + 5700K
CCT Selection DIP Switch: Yes
Dimmable: No
Luminous Flux +/- 5%: 5290-5520Lm
Lumens per Watt: 90-100Lm
CRI: >80
Beam Angle: 120°
UGR: 22
Electrical Class: Class II
IP Rating: IP40
Product Finishing(Base): White
Material: PMMA(Lens) + PS(Diffuser) + Aluminium(Frame)
Average Lifetime: 50 000Hr
Operating Temperature: -20°C ~ 45°C
Storage Temperature: -20°C ~ 65°C
Extra Available: WXX402 Surface Frame

Warm white (3000K)   Cool white (4000K)   Day light (5700K)

NB: All LED panels need to be protected on the primary side by circuit protection against power & voltage surges.